








**Recessed**




# Link T5




## IP20 CE

The Link Fitting Has An Aesthetically Pleasing Slim Profile Body Made To Enhance The Look Of Any Installation.

-  Body constructed from powder coated zintec steel.
-  Lift and tilt opal or prismatic diffuser.
-  Supplied as standard with leading brand high frequency control gear.
-  Continuous run or stand alone .
-  Available with or without front trim.

**Available options ....**

-  Lumafix brackets available, see page 61
-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

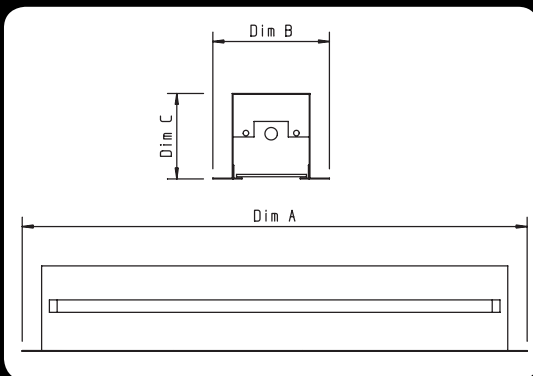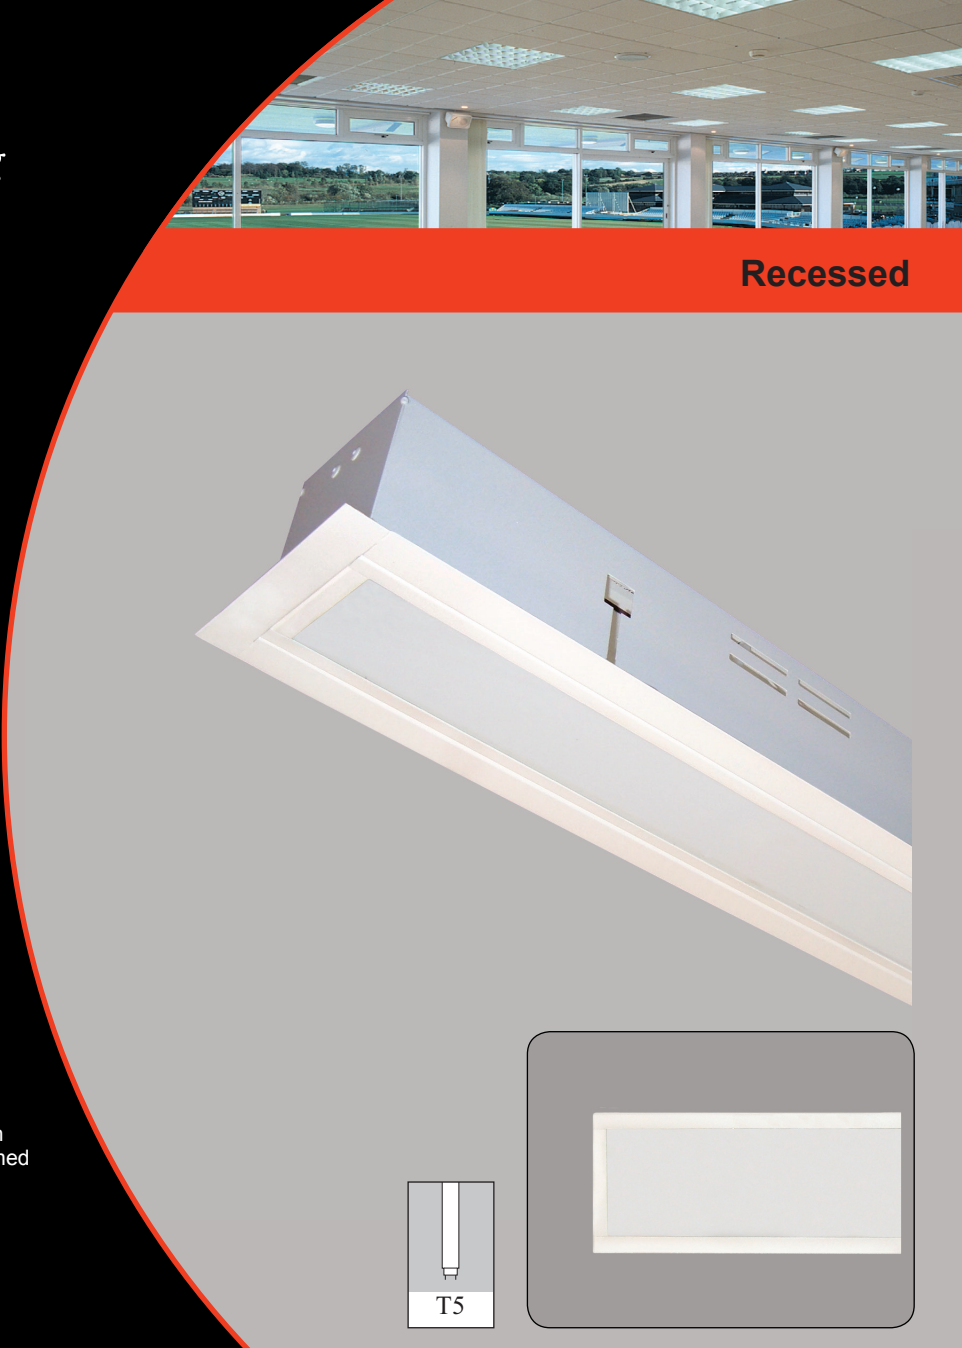

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
LK214/24*	630mm	150mm	110mm	2	14/24w T5
LK128/54*	1230mm	150mm	110mm	1	28/54w T5
LK228/54*	1230mm	150mm	110mm	2	28/54w T5
LK135/49*	1530mm	150mm	110mm	1	35/49w T5
LK235/49*	1530mm	150mm	110mm	2	35/49w T5

Lumafix brackets available, see page 61 \*Please state wattage when ordering.  
\*Dimensions above include 25mm finishing trim.

Control Suffix	
DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Body Style Suffix	
TR	With Trim (25mm)
TL	Trimless
CR	Continuous Run
SA	Stand Alone

Controller Suffix	
TPA	TPA Prismatic Diffuser
OP	OPAL Diffuser