












**Recessed**



# Rear Access IP65 Universal T5 IP65 CE

The Rear Access Universal IP65 Is A Sealed Luminaire Suitable For Areas Where A Rear Access Is Required. An Ingress Protection Of Up To Ip65 Is Offered.

-  Body constructed from powder coated zintec steel, with white or silver trim.
-  The acrylic prismatic diffuser is sealed into the body, with hinged or lift off rear access for maintainance.
-  External flange can be sealed to ceiling.
-  Supplied as standard with leading brand high frequency control gear.
-  Please advise ceiling type at installation when enquiring.

**Available options ....**

-  Lumafix brackets available, see page 61
-  Various energy saving dimmable options
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Other diffusers available including glass, tpa prismatic & clear polycarbonate.

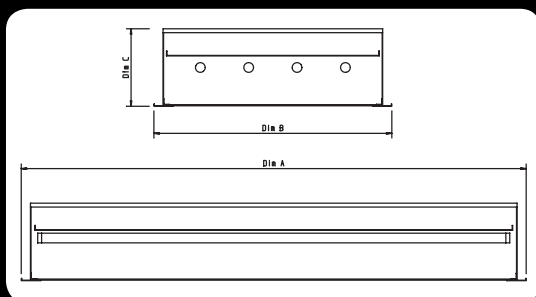

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
RA000IP65T14/24*	705mm	615mm	200mm	2	14/24w
RA001IP65T14/24*	705mm	615mm	200mm	2	14/24w
RA002IP65T14/24*	705mm	615mm	200mm	3	14/24w
RA003IP65T14/24*	705mm	615mm	200mm	4	14/24w
RA004IP65T28/54*	1305mm	615mm	200mm	2	28/54w
RA005IP65T28/54*	1305mm	615mm	200mm	2	28/54w
RA006T28/54IP65*	1305mm	615mm	200mm	3	28/54w
RA007T28/54IP65*	1305mm	615mm	200mm	4	28/54w

Lumafix brackets available, see page 61 \*Please state wattage when ordering

**Control Suffix**

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

**Controller Suffix**

TPA	TPA Prismatic Diffuser
GL	4mm Toughened Glass
PP	Polycarbonate Diffuser