









## Softlux S5 Surface IP20 CE

The Softlux 5 Surface Is A Slimline Direct/ Indirect Surface Modular Incorporating A Lift And Tilt Style Wedge Louvre Mounted In A Central Basket Making For A Practical, Aesthetically Pleasing Luminaire.

-  Body constructed from powder coated zintec steel.
-  Lift and tilt single channel wedge louvre.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.

### Available options ....

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit and various plug and socket choices all aimed at saving time and effort at installation stage.

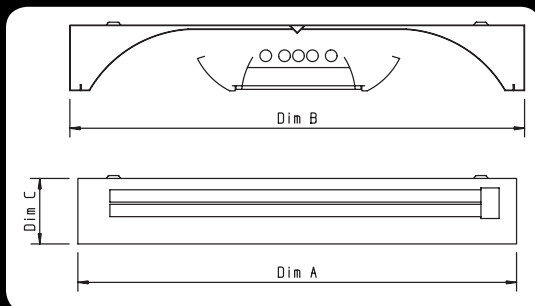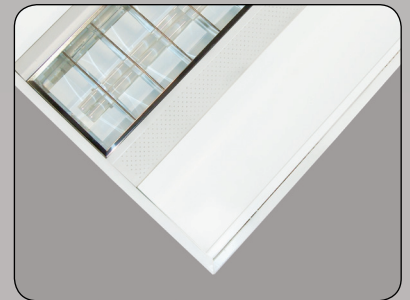

| Order Code | Dim A | Dim B | Dim C | Lamps | Wattage |
|------------|-------|-------|-------|-------|---------|
| S5iS214    | 603mm | 625mm | 90mm  | 2     | 14w T5  |
| S5iS224    | 603mm | 625mm | 90mm  | 2     | 24w T5  |
| S5iS314    | 603mm | 625mm | 90mm  | 3     | 14w T5  |
| S5iS324    | 603mm | 625mm | 90mm  | 3     | 24w T5  |
| S5iS414    | 603mm | 625mm | 90mm  | 4     | 14w T5  |
| S5iS424    | 603mm | 625mm | 90mm  | 4     | 24w T5  |
| S5iS140    | 603mm | 625mm | 90mm  | 1     | 40w PLL |
| S5iS155    | 603mm | 625mm | 90mm  | 1     | 55w PLL |
| S5iS240    | 603mm | 625mm | 90mm  | 2     | 40w PLL |
| S5iS255    | 603mm | 625mm | 90mm  | 2     | 55w PLL |

### Control Suffix

|      |                            |
|------|----------------------------|
| DA   | DALI Dimmable              |
| DSI  | DSI Dimmable               |
| TD   | Touch Dimmable             |
| AD   | 1-10v Analogue Dimmable    |
| EL   | 3 Hour Integral Emergency  |
| ELST | Self Test Emergency 3 Hour |