








Softlux S4 Multi





IP20 CE

The Softlux 4 Surface Modular Range Provides The Perfect Marriage Between Good Looks And Practicality With Direct Lighting Through The Shootbolt Retained Louvre, Soft Indirect Lighting Through The Perforated Angled Sides And Backlighting Projected Onto The Ceiling.

-  Body constructed from powder coated zintec steel.
-  Shootbolt retained lg7 2007 (65 deg cut off) louvre for ease of fit and better security.
-  Perforated side baffles provide a soft indirect light.
-  Rear cut outs provide ceiling/indirect lighting.
-  Supplied as standard with leading brand high frequency control gear.

Available options

-  Various energy saving dimmable options.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

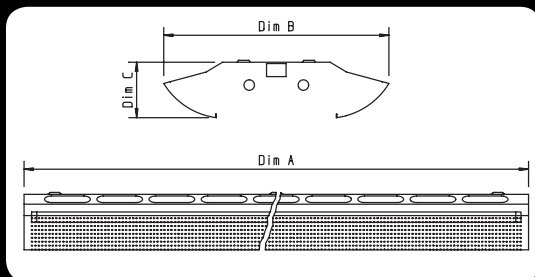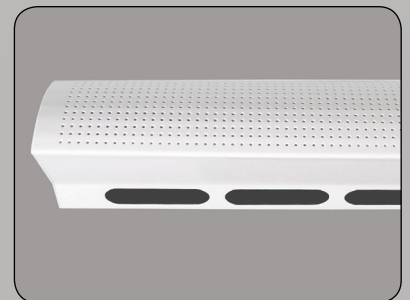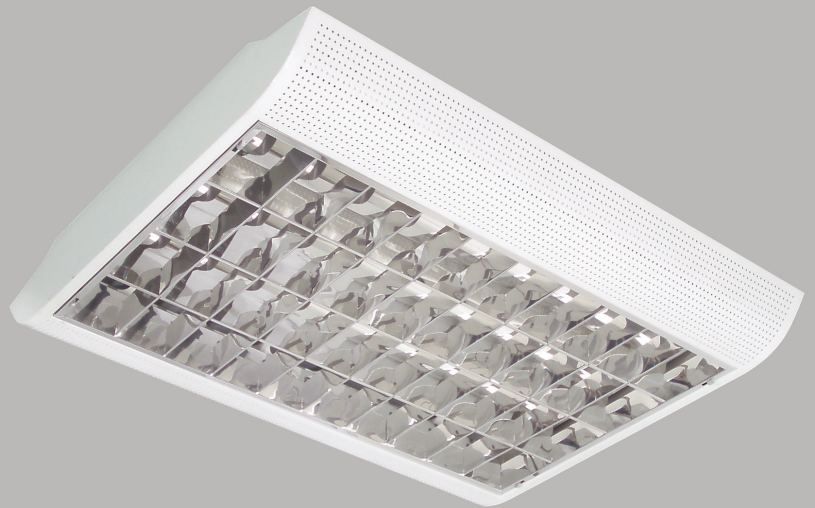

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S4iS214/24*	600mm	350mm	85mm	2	14/24w T5
S4iS314/24*	600mm	430mm	85mm	3	14/24w T5
S4iS414/24*	600mm	510mm	85mm	4	14/24w T5

*Please state wattage when ordering

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour