









## Comfortlux IP20 CE

The Comfortlux Luminaire Is Designed To Provide An Indirect Lighting Environment. A Discreetly Beautiful Fitting Aimed At Suiting Any Office Or Retail Environment.

-  Body constructed from powder coated zinc steel.
-  Drop style perforated central basket provides a soft indirect light.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.

### Available options ....

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage

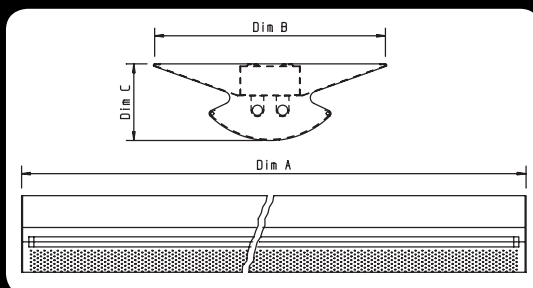

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
CFL214/24*	584mm	370mm	120mm	2	14/24w T5
CFL128/54*	1184mm	370mm	120mm	1	28/54w T5
CFL228/54*	1184mm	370mm	120mm	2	28/54w T5
CFL135/49/80*	1484mm	370mm	120mm	1	35/49/80w T5
CFL235/49/80*	1484mm	370mm	120mm	2	35/49/80w T5
CFL136HF	1234mm	370mm	120mm	1	36w T8
CFL236HF	1234mm	370mm	120mm	2	36w T8
CFL158HF	1534mm	370mm	120mm	1	58w T8
CFL258HF	1534mm	370mm	120mm	2	58w T8

\*Please state wattage when ordering

### Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour