









Prolite T8




IP20 CE

The Prolite T8 Has An Aesthetically Pleasing Chamfered Edge Body Made To Enhance The Look Of Any Installation.

-  Body constructed from white coated steel.
-  Lift and tilt wedge louvre comes complete with louvre straps for added security.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct light distribution as standard.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Suspended version with 1.5 Metre adjustable clutch mechanism suspension kit.
-  Ceiling/indirect lighting available either through cut outs on the back of the fitting when suspended or on the back shoulder of the fitting when surface mounted.

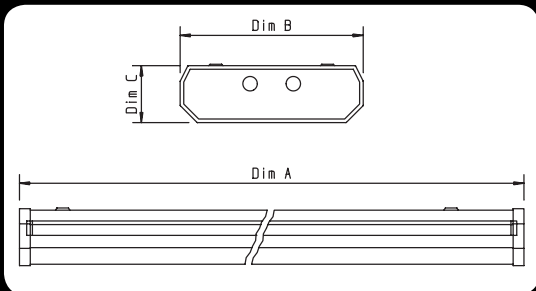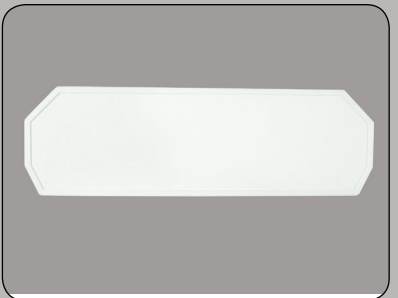

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
SPL218HF	628mm	254mm	79mm	2	18w T8
SPL136HF	1228mm	254mm	79mm	1	36w T8
SPL236HF	1228mm	254mm	79mm	2	36w T8
SPL158HF	1528mm	254mm	79mm	1	58w T8
SPL258HF	1528mm	254mm	79mm	2	58w T8
SPL170HF	1828mm	254mm	79mm	1	70w T8
SPL270HF	1828mm	254mm	79mm	2	70w T8

Control Suffix	
DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Controller Suffix	
C2	Wedge Louvre
TPA	TPA Prismatic Diffuser
TPB	TPB Prismatic Diffuser

Additions	
SL	Side Light
UL	Up Light
WS	Wire Suspension