

Torra



IP20 CE

The Torra Range Is A Robust High Quality Fitting With The Flexibility Of Numerous Mounting, Directional Lighting And Continuous Run Configurations That Can Suit Any Application.

- Body constructed using a slim, stylish extruded aluminium, powder coated white ral9010 as standard.
- Leafspring retained lg7 2007 (65 deg cut off) louvre for ease of fit and better security.
- Supplied as standard with leading brand high frequency control gear.
- Continuous run or stand alone mounting.
- Suspended version has direct & indirect light distribution as standard.

Available options

- Various energy saving dimmable options.
- Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
- Suspended version with 1.5 Metre adjustable clutch mechanism suspension kit.
- Downlight only
- Many other ral colour finishes available.

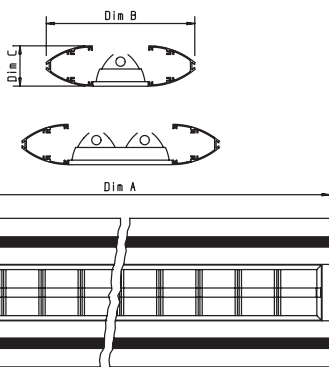

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
TOR128	1200mm	260mm	70mm	1	28w T5
TOR228	1200mm	342mm	70mm	2	28w T5
TOR154	1200mm	260mm	70mm	1	54w T5
TOR254	1200mm	342mm	70mm	2	54w T5
TOR135	1500mm	260mm	70mm	1	35w T5
TOR235	1500mm	342mm	70mm	2	35w T5
TOR149	1500mm	260mm	70mm	1	49w T5
TOR249	1500mm	342mm	70mm	2	49w T5

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Additions

WS	Wire Suspension
PP	Polycarb Back Cover

Body Style Suffix

SB	Solid Back (no uplight)
----	-------------------------