








Recessed



Softlux S3



IP20 CE

The Softlux 3 Is A Slimline Direct/Indirect Semi-Recessed Modular Which Has A Perforated Central Basket That Sits Below Ceiling Level Which Is Especially Pleasing To The Eye Whilst Aiding In The Design Of Any Lg7 Application.

-  Body constructed from powder coated zintec steel.
-  Drop style (below ceiling level) perforated central basket provides a soft indirect light.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

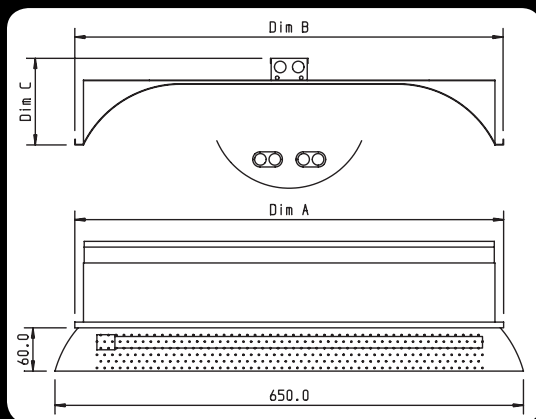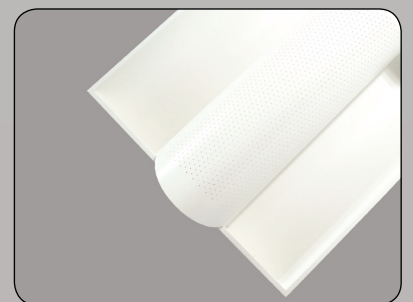

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S3i214	595mm	595mm	120mm	2	14w T5
S3i224	595mm	595mm	120mm	2	24w T5
S3i314	595mm	595mm	120mm	3	14w T5
S3i324	595mm	595mm	120mm	3	24w T5
S3i414	595mm	595mm	120mm	4	14w T5
S3i424	595mm	595mm	120mm	4	24w T5
S3i140	595mm	595mm	120mm	1	40w PLL
S3i155	595mm	595mm	120mm	1	55w PLL
S3i240	595mm	595mm	120mm	2	40w PLL
S3i255	595mm	595mm	120mm	2	55w PLL

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour