













Maxi Flood


IP54 CE

A Robust Range Of High Powered H.I.D Floodlights Ranging From 150W To 400W And Suitable For The Majority Of Exterior And Interior Applications..

-  Body constructed from die cast aluminium.
-  Powder coated black as standard.
-  Symmetrical reflector.
-  Toughened front safety glass.
-  Supplied as standard with leading brand control gear & lamp
-  Adjustable mounting bracket gives optimum lighting capability.

Available options

-  Dished polycarbonate diffuser.
-  Photocell for automatic dusk till dawn operation.
-  Energy saving versions available are:
200W metal halide (replaces 250w)
350W metal halide (replaces 400w)
-  Range of high frequency metal halide dimmable gear from 150w to 400w

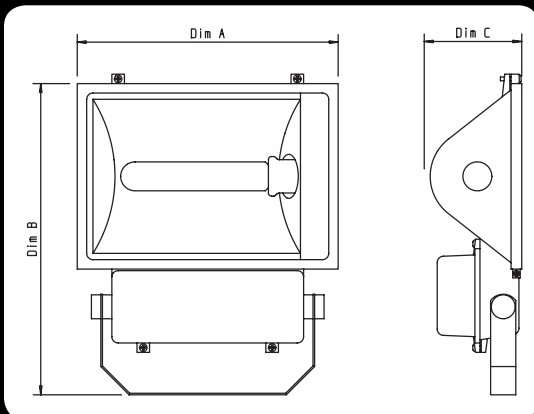

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
FL004	415mm	495mm	145mm	SON	150w
FL005	415mm	495mm	145mm	SON	250w
FL006	415mm	495mm	145mm	SON	400w
FL007	415mm	495mm	145mm	MERCURY	250w
FL008	415mm	495mm	145mm	HQI	250w
FL009	415mm	495mm	145mm	HQI	400w

Control Suffix

PC Photo Cell

Controller Suffix

DP Dished Polycarbonate Cover