








Recessed



Softlux S5 Eco


IP20 CE

The Softlux 5 Eco Is A Slimline Direct/ Indirect Recessed Modular Incorporating A Lift And Tilt Style Wedge Louvre Mounted In A Central Basket Making For A Practical, Aesthetically Pleasing Luminaire.

-  Body constructed from powder coated zintec steel.
-  Lift and tilt single channel wedge louvre.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

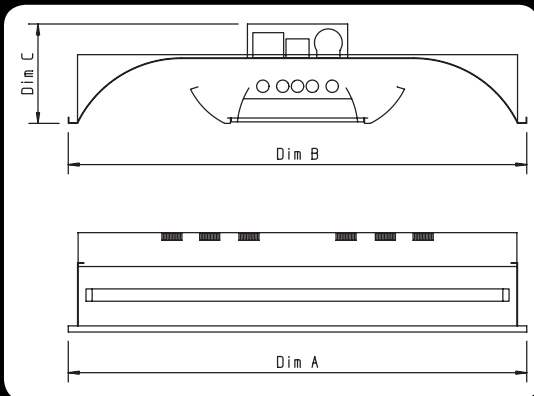

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S5iEC214	595mm	595mm	130mm	2	14w T5
S5iEC224	595mm	595mm	130mm	2	24w T5
S5iEC314	595mm	595mm	130mm	3	14w T5
S5iEC324	595mm	595mm	130mm	3	24w T5
S5iEC414	595mm	595mm	130mm	4	14w T5
S5iEC424	595mm	595mm	130mm	4	24w T5
S5iEC140	595mm	595mm	130mm	1	40w PLL
S5iEC155	595mm	595mm	130mm	1	55w PLL
S5iEC240	595mm	595mm	130mm	2	40w PLL
S5iEC255	595mm	595mm	130mm	2	55w PLL

Control Suffix	
DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour