












**Recessed**



## Enclosed IP20 CE

The Standard Enclosed Luminaires Are A Range Of Slimline Economic Recessed Modulares Suitable For An Array Of Attachments All To Go Into A 15Mm Or 25Mm T-Bar Ceiling.

-  Body constructed from white coated steel.
-  Shallow 95mm depth.
-  Fitting designed to suit both 15mm and 25mm T-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Please advise 15mm or 25mm T-bar ceiling type at installation when ordering attachments to suit.

### Available options ....

-  T5 or PLL versions available
-  5ft & 6ft sizes available on request
-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

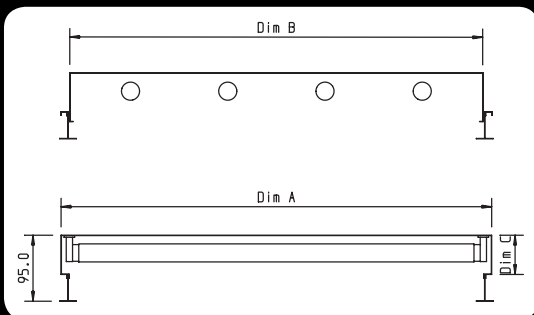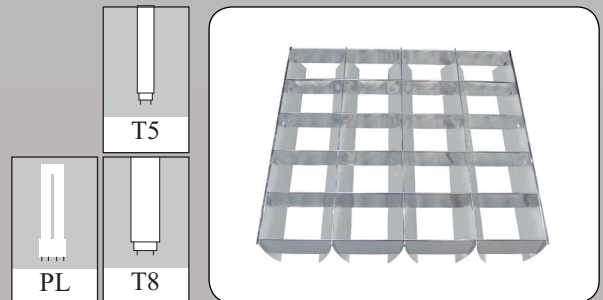

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
TE218HF	622mm	295mm	56mm	2	18w T8
TE318HF	622mm	595mm	56mm	3	18w T8
TE418HF	622mm	595mm	56mm	4	18w T8
TE236HF	1232mm	295mm	56mm	2	36w T8
TE336HF	1232mm	595mm	56mm	3	36w T8
TE436HF	1232mm	595mm	56mm	4	36w T8

### Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

### Controller Suffix

C2	Wedge Louvre
LB	Ribbed Low Brightness Louvre
TPA	TPA Prismatic Diffuser
TPB	TPB Prismatic Diffuser