







Recessed



Softlux S1



IP20 CE

The Softlux 1 Is A Slimline Direct/Indirect Recessed Modular Incorporating A Perforated Central Basket Developed To Be Aesthetically Pleasing.

-  Body constructed from powder coated zintec steel.
-  Perforated central basket provides a soft indirect light.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

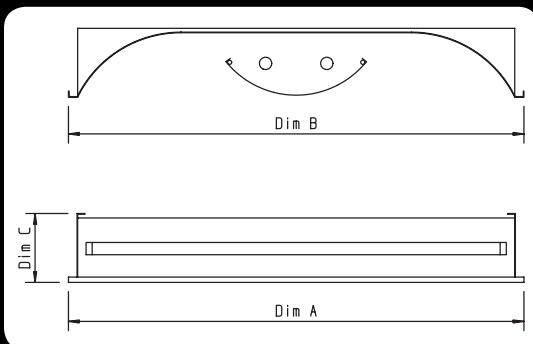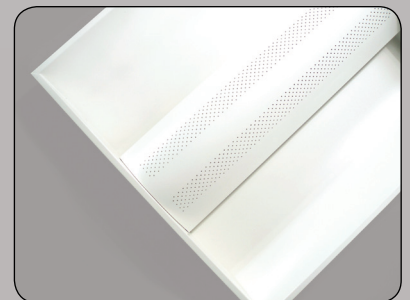

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S1i214	595mm	595mm	90mm*	2	14w T5
S1i224	595mm	595mm	90mm*	2	24w T5
S1i314	595mm	595mm	90mm*	3	14w T5
S1i324	595mm	595mm	90mm*	3	24w T5
S1i414	595mm	595mm	90mm*	4	14w T5
S1i424	595mm	595mm	90mm*	4	24w T5
S1i140	595mm	595mm	90mm*	1	40w PLL
S1i155	595mm	595mm	90mm*	1	55w PLL
S1i240	595mm	595mm	90mm*	2	40w PLL
S1i255	595mm	595mm	90mm*	2	55w PLL

*Height for emergency 135mm

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour