







Recessed



Softlux S1 Linear


IP20 CE

The Softlux 1 Linear Is A Slimline Direct/ Indirect Recessed Modular Incorporating A Perforated Central Basket Developed To Be Aesthetically Pleasing.

-  Body constructed from powder coated zintec steel.
-  Perforated central basket provides a soft indirect light.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

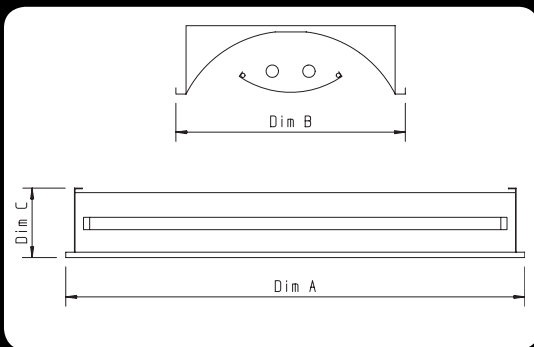

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S1iL114/24**	595mm	295mm	90mm*	1	14/24w T5
S1iL214/24**	595mm	295mm	90mm*	2	14/24w T5
S1iL128/54**	1195mm	295mm	90mm*	1	28/54w T5
S1iL228/54**	1195mm	295mm	90mm*	2	28/54wT5
S1iL140/55**	595mm	295mm	90mm*	1	40/55w PLL
S1iL240/55**	1195mm	295mm	90mm*	2	40/55w PLL
S1iL128/54**/600	1195mm	595mm	90mm*	1	28/54w T5
S1iL228/54**/600	1195mm	595mm	90mm*	2	28/54w T5
S1iL328/54**/600	1195mm	595mm	90mm*	3	28/54w T5
S1iL428/54**/600	1195mm	595mm	90mm*	4	28/54w T5
S1iL240/55**/600	1195mm	595mm	90mm*	2	40/55w PLL
S1iL440/55**/600	1195mm	595mm	90mm*	4	40/55w PLL

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

*Height for emergency 135mm

**Please state wattage when ordering