








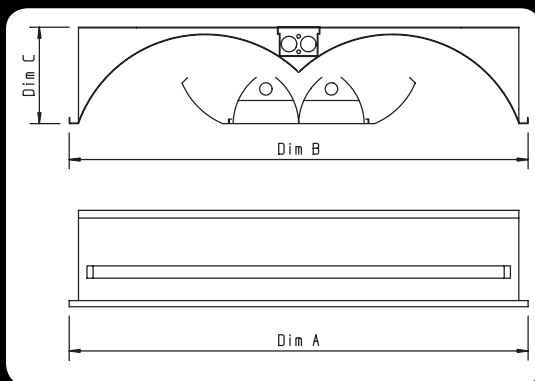

Recessed

Softlux S5 Pro

IP20 CE

The Softlux 5 Pro Is A Deep Bodied Direct/ Indirect Recessed Modular Developed To Be Aesthetically Pleasing Whilst Aiding In The Design Of Any Lg7 Application. The Deeper Body Gives An Improved Light Output Rating Compared To Shallower Versions Of This Product Meaning That Less Fittings Are Needed To Get The Same Lighting Levels In Any Lighting Design.

-  Body constructed from powder coated zintec steel.
 -  Shootbolt retained lg7 2007 (65 deg cut off) louvre for ease of fit and better security.
 -  Designed to suit both 15mm and 25mm t-bar ceilings.
 -  Supplied as standard with leading brand high frequency control gear.
 -  Direct/indirect light distribution as standard.
- Available options**
-  Various energy saving dimmable options
 -  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.



Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S5iPRO214	595mm	595mm	125mm*	2	14w T5
S5iPRO224	595mm	595mm	125mm*	2	24w T5
S5iPRO414	595mm	595mm	125mm*	4	14w T5
S5iPRO424	595mm	595mm	125mm*	4	24w T5
S5iPRO140	595mm	595mm	125mm*	1	40w PLL
S5iPRO155	595mm	595mm	125mm*	1	55w PLL
S5iPRO240	595mm	595mm	125mm*	2	40w PLL
S5iPRO255	595mm	595mm	125mm*	2	55w PLL

*Height for emergency 150mm

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour