








## Softlux S5 Pro PIR


### IP20 CE

The Softlux 5 Pro PIR Is A Deep Bodied Direct/Indirect Recessed Modular Developed To Be Aesthetically Pleasing Whilst Aiding In The Design Of Any Lg7 Application. The Deeper Body Gives An Improved Light Output Rating Compared To Shallower Versions. The inbuilt PIR/dimming sensor offers fully controllable lighting.

-  Body constructed from powder coated zintec steel.
-  Shootbolt retained lg7 2007 (65 deg cut off) louvre for ease of fit and better security.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.
-  In built programmable movement and lux sensor.

#### Available options ....

-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

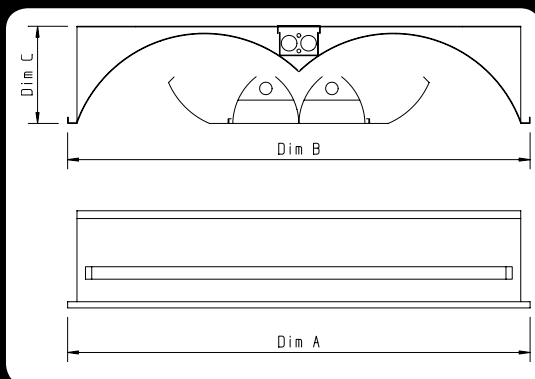

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S5iPRO214PIR	595mm	595mm	125mm*	2	14w T5
S5iPRO224PIR	595mm	595mm	125mm*	2	24w T5
S5iPRO414PIR	595mm	595mm	125mm*	4	14w T5
S5iPRO424PIR	595mm	595mm	125mm*	4	24w T5
S5iPRO140PIR	595mm	595mm	125mm*	1	40w PLL
S5iPRO155PIR	595mm	595mm	125mm*	1	55w PLL
S5iPRO240PIR	595mm	595mm	125mm*	2	40w PLL
S5iPRO255PIR	595mm	595mm	125mm*	2	55w PLL

\*Height for emergency 150mm

#### Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour