










Recessed


Softlux S5 Wallwash IP20 CE

The Softlux 5 Wallwash Is A Slimline Direct/ Indirect Recessed Wallwash Modular Incorporating A Wedge Louvre Mounted In A Perforated Central Basket Making For A Practical, Aesthetically Pleasing Luminaire Which Aids In The Design Of Any Lg7 Application.

-  Body constructed from powder coated zintec steel.
-  Shootbolt retained Ig7 (2007 65 deg cut off) louvre for ease of fit and better security.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect & wallwash light distribution as standard.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

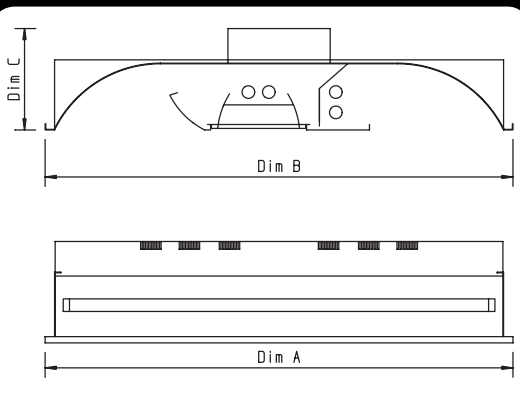

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S5iWW214	595mm	595mm	130mm	2	14w T5
S5iWW224	595mm	595mm	130mm	2	24w T5
S5iWW414	595mm	595mm	130mm	4	14w T5
S5iWW424	595mm	595mm	130mm	4	24w T5
S5iWW240	595mm	595mm	130mm	2	40w PLL
S5iWW255	595mm	595mm	130mm	2	55w PLL

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour