










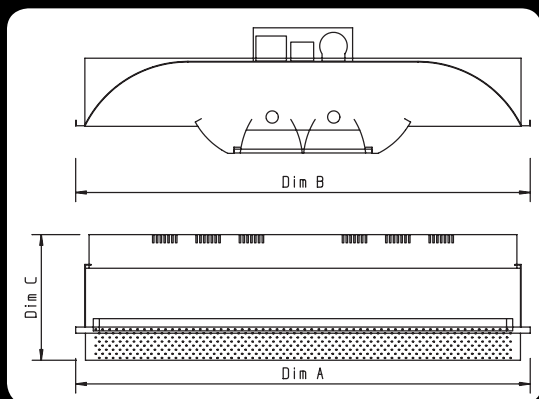
Recessed

Softlux S6

IP20 CE

The Softlux 6 Is A Direct/Indirect Semi Recessed Modular Developed To Be Aesthetically Pleasing Whilst Aiding In The Design Of Any Lg7 Application. The Drop Basket Gives An Improved Light Output Rating Meaning That Less Fittings Are Needed To Get The Same Lighting Levels In Any Lighting Design.

-  Body constructed from powder coated zintec steel.
 -  Shootbolt retained lg7 (2007 65 deg cut off) louvre for ease of fit and better security.
 -  Designed to suit both 15mm and 25mm t-bar ceilings.
 -  Supplied as standard with leading brand high frequency control gear.
 -  Direct/indirect light distribution as standard.
- Available options**
-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
 -  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.



Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S6i214	595mm	595mm	165mm	2	14w T5
S6i224	595mm	595mm	165mm	2	24w T5
S6i414	595mm	595mm	165mm	4	14w T5
S6i424	595mm	595mm	165mm	4	24w T5
S6i240	595mm	595mm	165mm	2	40w PLL
S6i255	595mm	595mm	165mm	2	55w PLL

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour