







Recessed





Universal IP65 C2 T8



IP65 CE

The Universal T8 IPC2 Is A Moisture Resistant Luminaire Suitable For Areas Where Controlled Light And A Sealed Unit Are Required. An Ingress Protection Of Up To IP65 Is Offered.

-  Body constructed from powder coated zintec steel.
-  The wedge louvre is fitted behind the glass diffuser and both are set within the powder coated zintec frame which is retained into the body via screw fixings which come complete with caps for an aesthetically pleasing finish.
-  Supplied as standard with leading brand high frequency control gear.
-  Please advise ceiling type at installation when ordering.

Available options

-  Lumafix brackets available, see page 61
-  Various energy saving dimmable options.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Other diffusers available including clear polycarbonate panels.

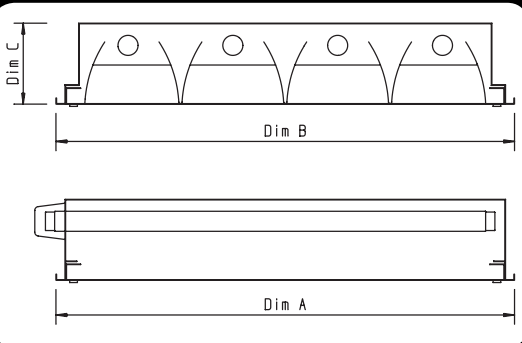

| Order Code | Dim A | Dim B | Dim C | Lamps | Wattage |
|-------------|--------|-------|-------|-------|---------|
| UMC2IP218HF | 595mm | 295mm | 105mm | 2 | 18w T8 |
| UMC2IP318HF | 595mm | 595mm | 105mm | 3 | 18w T8 |
| UMC2IP418HF | 595mm | 595mm | 105mm | 4 | 18w T8 |
| UMC2IP236HF | 1195mm | 295mm | 105mm | 2 | 36w T8 |
| UMC2IP336HF | 1195mm | 595mm | 105mm | 3 | 36w T8 |
| UMC2IP436HF | 1195mm | 595mm | 105mm | 4 | 36w T8 |

Lumafix brackets available, see page 61

Control Suffix

| | |
|------|----------------------------|
| DA | DALI Dimmable |
| DSI | DSI Dimmable |
| TD | Touch Dimmable |
| AD | 1-10v Analogue Dimmable |
| HF | High Frequency |
| EL | 3 Hour Integral Emergency |
| ELST | Self Test Emergency 3 Hour |

Controller Suffix

PP Polycarb Cover