






**Recessed**






# Universal IP65 T8



## IP65 CE

The Universal IP T8 Is A Moisture Resistant Luminaire Suitable For Areas Where A Sealed Unit Is Required. An Ingress Protection Of Up To IP65 Is Offered. Suitable For Mounting Into Most Ceiling Types.

-  Body constructed from powder coated zintec steel.
-  The acrylic prismatic diffuser is set within the powder coated zintec frame which is retained into the body via screw fixings which come complete with caps for an aesthetically pleasing finish.
-  Supplied as standard with leading brand high frequency control gear.
-  Please advise ceiling type at installation when enquiring.

### Available options ....

-  Lumafix brackets available, see page 61
-  PLL version also available
-  Various energy saving dimmable options.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Other diffusers available including glass, clear or opal polycarbonate panels.

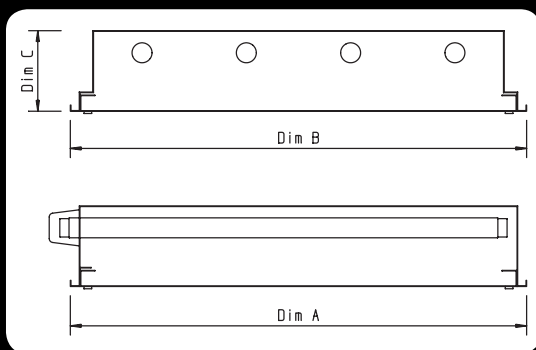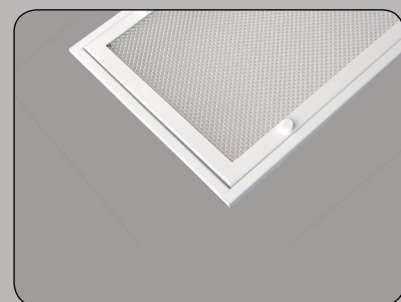

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
UMIP218HF	595mm	295mm	105mm	2	18w T8
UMIP318HF	595mm	595mm	105mm	3	18w T8
UMIP418HF	595mm	595mm	105mm	4	18w T8
UMIP236HF	1195mm	295mm	105mm	2	36w T8
UMIP336HF	1195mm	595mm	105mm	3	36w T8
UMIP436HF	1195mm	595mm	105mm	4	36w T8

### Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
HF	High Frequency
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Lumafix brackets available, see page 61

### Controller Suffix

TPA	TPA Prismatic Diffuser
GL	4mm Toughened Glass
PP	Polycarb Cover