














**Recessed**

# Universal T8

## IP20 CE

The Universal T8 Is Designed To Give A High Class Finish To Any Commercial Or Retail Environment Where It Can Be Fitted Into Most Ceiling Types.

-  Body constructed from powder coated zintec steel.
  -  Complete with wedge louvre or framed tpa prismatic diffuser with wishbone springs for ease of fit and better security.
  -  Supplied as standard with leading brand high frequency control gear.
  -  Please advise ceiling type at installation when enquiring.
- Available options ....**
-  Lumafix brackets available, see page 61
  -  Energy saving control options including analogue dimming, digital dimming, movement and daylight sensing.
  -  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
  -  Burgess ceiling version also available.

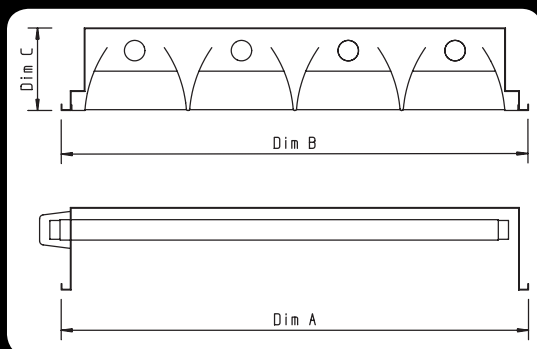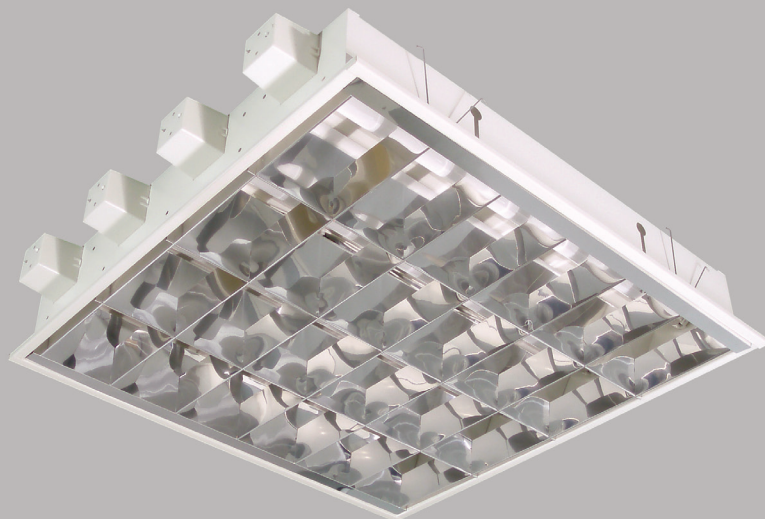

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
UM218HF	595mm	295mm	105mm	2	18w
UM318HF	595mm	595mm	105mm	3	18w
UM418HF	595mm	595mm	105mm	4	18w
UM236HF	1195mm	295mm	105mm	2	36w
UM336HF	1195mm	595mm	105mm	3	36w
UM436HF	1195mm	595mm	105mm	4	36w
UM258HF	1495mm	295mm	105mm	2	58w

Lumafix brackets available, see page 61

### Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
HF	High Frequency
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

### Controller Suffix

C2	Wedge Louvre
LB	Ribbed Low Brightness Louvre
TPA	TPA Prismatic Diffuser