







Retail & Display





Uniwallwasher


IP20 CE

The Recessed Universal Wallwasher Luminaire Has An Assymetric Light Distribution Which Is Ideal For Illumination Of Walls, Display Shelving And Other Vertical Surfaces

-  Body constructed from powder coated zintec steel.
-  Assymetric aluminium specular reflectors.
-  Designed to suit both 15mm & 25mm t-bar as well as plasterboard ceilings.
-  Supplied as standard with leading brand high frequency control gear.

Available options

-  Lumafix brackets available, see page 61
-  Various energy saving dimmable options.
-  Wiring configurations such as dual circuit, Through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Burgess ceiling version available.

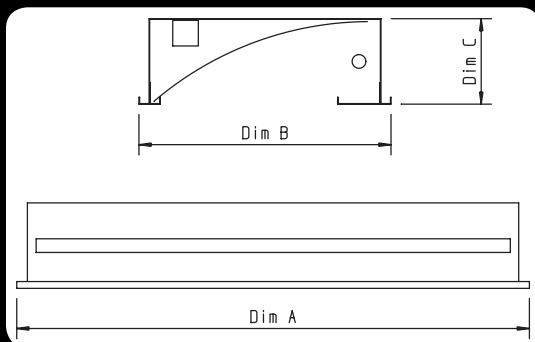

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
UMWW114/24*	595mm	295mm	105mm	1	14/24w T5
UMWW214/24*	595mm	295mm	105mm	2	14/24w T5
UMWW128/54*	1195mm	295mm	105mm	1	28/54w T5
UMWW228/54*	1195mm	295mm	105mm	2	28/54w T5
UMWW140	595mm	295mm	105mm	1	40w PLL
UMWW240	1195mm	295mm	105mm	2	40w PLL
UMWW155	595mm	295mm	105mm	1	55w PLL
UMWW255	1195mm	295mm	105mm	2	55w PLL
UMWW180	595mm	295mm	105mm	1	80w PLL
UMWW280	1195mm	295mm	105mm	2	80w PLL

*Please state wattage when ordering

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour