









Wallwasher S



IP20 CE

The Surface Wallwasher Luminaire Has An Aesthetically Pleasing Chamfered Edge Body And Asymmetric Light Distribution Which Is Ideal For Illumination Of Walls, Display Shelving And Other Vertical Surfaces.

-  Body constructed from white coated steel.
-  Asymmetric aluminium specular reflectors.
-  Supplied as standard with leading brand high frequency control gear.

Available options

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Also available in a recessed version.

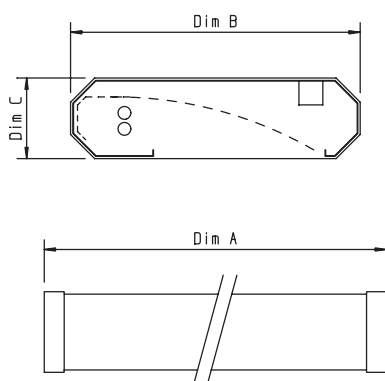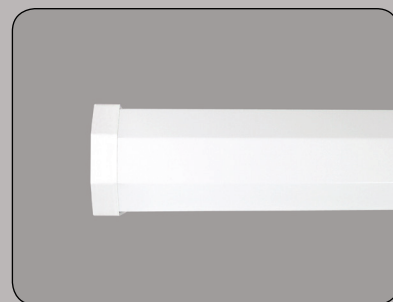

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
WWS114/24**	600mm	363mm	101mm	1	14/24w T5
WWS214/24*	600mm	363mm	101mm	2	14/24w T5
WWS128/54*	1200mm	363mm	101mm	1	28/54w T5
WWS228/54*	1200mm	363mm	101mm	2	28/54w T5
WWS140	600mm	363mm	101mm	1	40w PLL
WWS240	1200mm	363mm	101mm	2	40w PLL
WWS155	600mm	363mm	101mm	1	55w PLL
WWS255	1200mm	363mm	101mm	2	55w PLL

*Please state wattage when ordering

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour