










Blok




IP20 CE

The Blok Range Is A Favourite Amongst Architects And Consultants With Its Sleek Look And Various Options Of Mounting And Lighting Configurations.

-  Body constructed from zinc steel powder coated white as standard.
-  Leafspring retained Ig7 2007 (65 deg cut off) louvre for ease of fit and better security.
-  Supplied as standard with leading brand high frequency control gear.
-  Continuous run or stand alone mounting.
-  Suspended version has direct & indirect light distribution as standard.

Available options

-  Various energy saving dimmable options
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.
-  Suspended version with 1.5 Metre adjustable clutch mechanism suspension kit.
-  Many other ral colour finishes available.

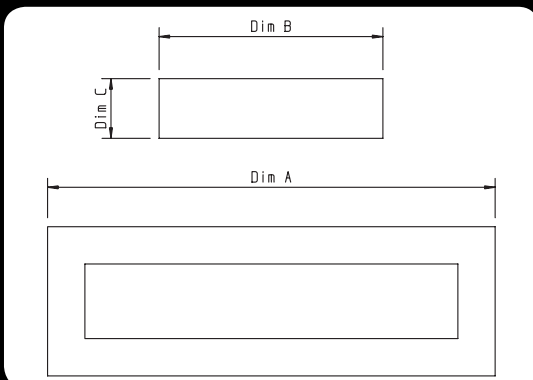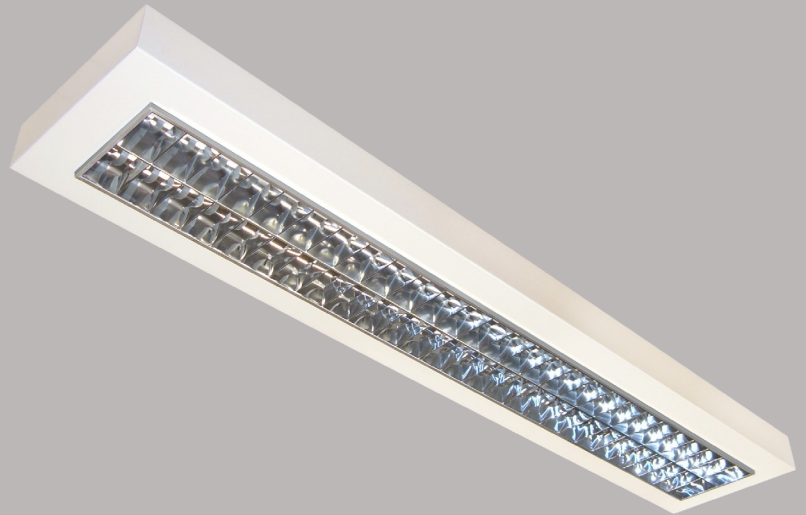

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
BL128/54*	1300mm	200mm	80mm	1	28/54w T5
BL228/54*	1300mm	300mm	80mm	2	28/54w T5
BL135/49*	1600mm	200mm	80mm	1	35/49w T5
BL235/49*	1600mm	300mm	80mm	2	35/49w T5

*Please state wattage when ordering

Control Suffix	
DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Controller Suffix	
C2	Wedge Louvre
TPA	TPA Prismatic Diffuser
OP	Smooth Opal Diffuser

Body Style Suffix	
SB	Solid Back (no upright)

Additions	
WS	Wire Suspension
PB	Polycarb Back Cover

