












Recessed



Enclosed T5 IP20 CE

The Standard Enclosed T5 Luminaires Are A Range Of Slimline Economic Recessed Modularity Suitable For An Array Of Attachments All To Go Into A 15mm Or 25mm T-Bar Ceiling.

-  Body constructed from white coated steel.
-  Shallow 95mm depth.
-  Fitting designed to suit both 15mm and 25mm T-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Please advise 15mm or 25mm T-bar ceiling type at installation when ordering attachments to suit.

Available options

-  T8 or PLL versions available
-  5ft ft sizes available on request
-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

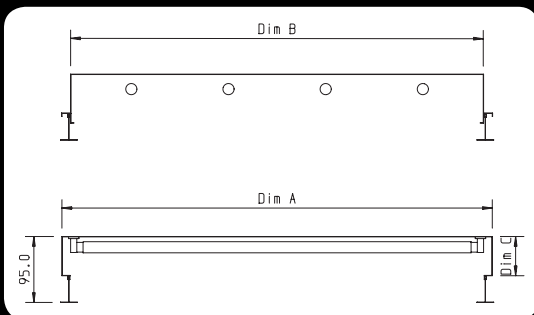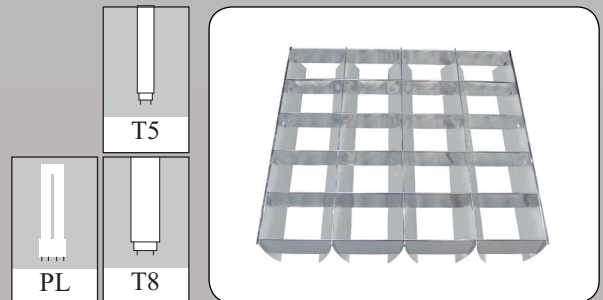

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
TE214/24*	622mm	295mm	56mm	2	14/24w T5
TE314/24*	622mm	595mm	56mm	3	14/24w T5
TE414/24*	622mm	595mm	56mm	4	14/24w T5
TE228/54*	1232mm	295mm	56mm	2	28/54w T5
TE328/54*	1232mm	595mm	56mm	3	28/54w T5
TE428/54*	1232mm	595mm	56mm	4	28/54w T5

*Please state wattage when ordering

Control Suffix

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

Controller Suffix

C2	Wedge Louvre
LB	Ribbed Low Brightness Louvre
TPA	TPA Prismatic Diffuser
TPB	TPB Prismatic Diffuser