







**Recessed**



# Softlux S5 LP


**IP20 CE**

The Softlux 5 LP Is A Slimline Direct/Indirect Recessed Modular Incorporating A Micro Linear Diffuser Mounted In A Perforated Central Basket Making For A Practical, Aesthetically Pleasing Luminaire.

-  Body constructed from powder coated zintec steel.
-  Lift and tilt framed micro linear diffuser.
-  Designed to suit both 15mm and 25mm t-bar ceilings.
-  Supplied as standard with leading brand high frequency control gear.
-  Direct/indirect light distribution as standard.

**Available options ....**

-  Energy saving control gear options including analogue dimming, digital dimming, movement and daylight sensing.
-  Wiring configurations such as dual circuit, through wiring and various plug and socket choices all aimed at saving time and effort at installation stage.

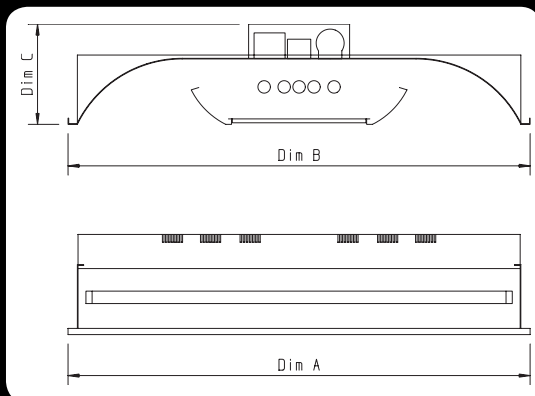

Order Code	Dim A	Dim B	Dim C	Lamps	Wattage
S5i214LP	595mm	595mm	130mm	2	14w T5
S5i224LP	595mm	595mm	130mm	2	24w T5
S5i314LP	595mm	595mm	130mm	3	14w T5
S5i324LP	595mm	595mm	130mm	3	24w T5
S5i414LP	595mm	595mm	130mm	4	14w T5
S5i424LP	595mm	595mm	130mm	4	24w T5
S5i140LP	595mm	595mm	130mm	1	40w PLL
S5i155LP	595mm	595mm	130mm	1	55w PLL
S5i240LP	595mm	595mm	130mm	2	40w PLL
S5i255LP	595mm	595mm	130mm	2	55w PLL

**Control Suffix**

DA	DALI Dimmable
DSI	DSI Dimmable
TD	Touch Dimmable
AD	1-10v Analogue Dimmable
EL	3 Hour Integral Emergency
ELST	Self Test Emergency 3 Hour

**Diffuser Suffix**

OP	Smooth Opal Diffuser
----	----------------------

